



# INDURO™

## TH-S TILT HEAD OPERATING INSTRUCTIONS

Thank you for making Induro your choice for professional photographic gear. Your Induro gear is manufactured to provide years of dependable service. In order to obtain optimum satisfaction and performance we suggest that you carefully read these instructions and provide them to anyone who may also use your Induro gear.

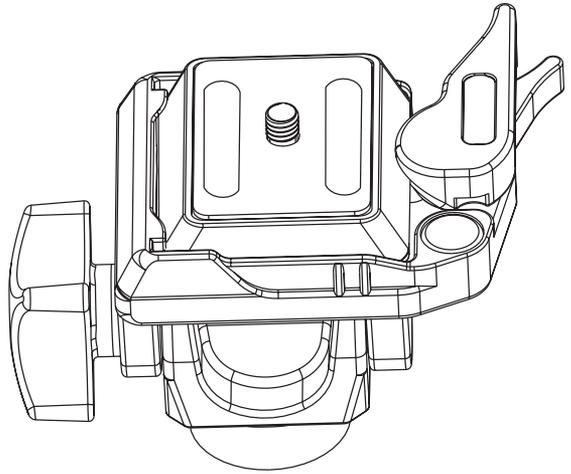

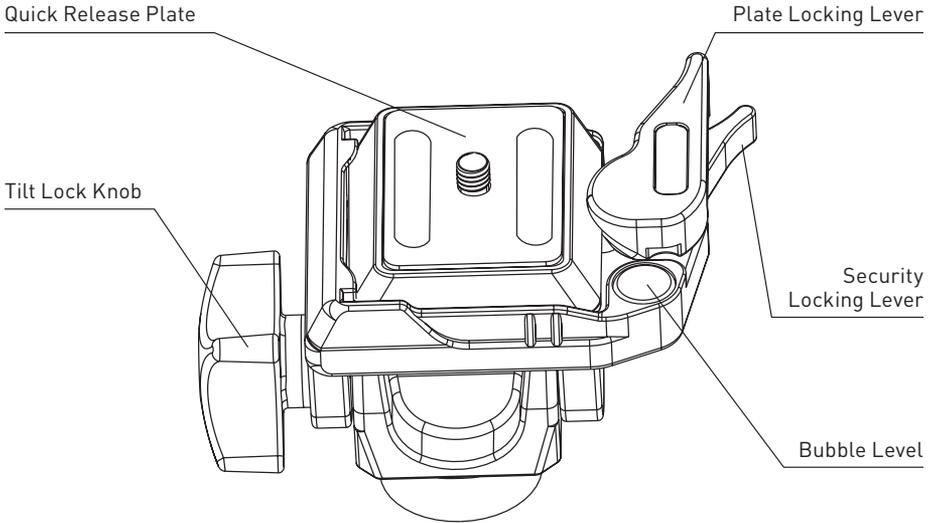

## USER NOTICE

- ⦿ Do not exceed the maximum specified load capacity (see Specification chart)
- ⦿ Always ensure that leg and head locks are tightly engaged before mounting a camera on the tripod
- ⦿ Do not use the tripod below temperatures of  $-4^{\circ}\text{F}$  or above  $+158^{\circ}\text{F}$  ( $-20^{\circ}\text{C}$  /  $+70^{\circ}\text{C}$ )
- ⦿ Do not leave the product in the sun for prolonged periods and avoid high temperature exposure
- ⦿ For your safety, don't let your Induro tripod come in contact with any electrical power source
- ⦿ Remove camera, lens, and all gear from the tripod when transporting the tripod
- ⦿ Avoid leaving the tripod unattended in areas where people could trip over the tripod and get hurt
- ⦿ Always clean and dry the tripod after it has been exposed to wet, dusty, sandy or salty conditions. Your tripod is not recommended for use in salt water. If required clean tripod using a mild soap solution applied with a soft cloth and follow by wiping down with fresh water. Remove any dust, dirt or sand from all leg locks, leg lock levers, leg sections and all moving parts.

## OPERATION

**1** Install by screwing the head clockwise onto the 3/8" mounting thread of monopod plate. Once it is hand tight, secure by fully tightening the three head locking screws from below.

**2** When used properly, the patented dual lock quick release system offers two levels of security for your gear. To remove the quick release plate, squeeze both the Plate Locking Lever and the Security Locking Lever and pull the larger locking lever out. The Quick Release Plate will disengage allowing it to be removed.

**3** To reconnect the Quick Release Plate, insert the angled part of the plate into the groove on the opposite side of the locking levers and press down flat. The locking levers will automatically engage the locking system and will return to the safety lock position. Press the Plate Locking Lever in firmly to secure.

**4** Horizontal rotation or panning can be easily accomplished by swiveling the entire monopod.

**5** Front to rear angle or tilt adjustments can be easily accomplished by first loosening the Tilt Lock Knob (be sure to hold firmly to balance weight of the camera). Position as desired and tighten the knob securely.

**6** Depending on your requirements, you may find it convenient to reorient the camera or lens 90 degrees on the Quick Release Plate and then remount. This allows the Tilt Control Knob to give you different positioning support.

## SPECIFICATIONS

CAT #	MODEL #	CAMERA MOUNT	TILT RANGE	PANNING RANGE	MATCHING MONOPODS	WEIGHT		LOAD	
						LB	KG	LB	KG
Monopod Tiltthead TH-Series									
484-001	TH-S	QR-3D-01-14S*	+90°/-90°	360°	0, 1 & 2	0.6	0.3	5.5	2.5
* 1/4-20 Quick Release Plate									

# INDURO™